

SUPERTRACK

Z24MK2

C-BAND Maritime VSAT Antenna

The SuperTrack Z-Series is the perfect solution for ships looking for broadband speeds at sea. Stay in touch with your networks via high speed access to the internet, email, multiple VoIP phones and more.



*Design is subject to change without notice

MOST SELECTED VSAT SERIES

The most customers in worldwide maritime industry have chosen SUPERTRACK Z Series MK2 as standard type VSAT System for their vessels. The Z Series MK2 convinces the optimal satellite communication performance to your vessels.

RELIABILITY, THE BASIC VIRTUE

On the middle of sea, under variable circumstances, the most important merit of communication equipment is reliable connection and stable tracking and network performance. Live chatting with friends, video call with family, listening radio over IP and even emergency phone calls, all kinds of communication to homeworld require network sustainability with reliable equipment. The SUPERTRACK Z Series, reliable partner all the time.

COST AFFORDABLE

With all the innovations, SUPERTRACK Z_Series MK2 has its various line-up and you can fulfil your needs with affordable costs.

PRODUCT KEY FEATURES

- **Automatic Satellite Search & Skew Control**
- **Brake System**
- **Accurate Signal Acquisition by KNS's Distinctive Algorithm**
- **Pre-programmed Satellite Database**
Editable 80 satellite data
- **Antenna Control Unit**
3 Types of Gyro Input (NMEA0183, Synchro, Step by Step)
- **Unlimited Azimuth**
Uninterrupted searching keep you in business however you ship turns Cable Wrap Free.
- **Certification/Qualification**
RoHS
- **Warranty information**
3-year parts warranty



Z24MK2 C-BAND Maritime VSAT Antenna

SPECIFICATIONS

ABOVE DECK

Dish Diameter	240cm (94.5")
Antenna Dimension	315cm(D) x 308cm(H)
Antenna Weight	530 Kg
Frequency	TX : 5.85 ~ 6.725 GHz RX : 3.4 ~ 4.2 GHz
Antenna Gain	TX : 41.7 dBi @ Mid frq GHz RX : 38 dBi @ Mid frq GHz
G / T	18.3 dB/K
Operating Platform	3 - Axis
LNB	Single PLL LNB
BUC	4W / 6W / 8W / 16W / 25W / 40W (optional)
Skew Control	Automatic Skew Control
Elevation Angle	-10° to +120°
Azimuth Range	Unlimited
Cross Angle	± 35°
Ship Motion	Roll : ±15° at 8-12 sec periods Pitch : ±10° at 6-12 sec periods Yaw : ±8° at 15-20 sec periods
Tracking Speed	More than 90°/sec
Antenna Input Power	90~264V AC 47/63Hz 17A
Temperature	-20°C to +55°C
Humidity	Up to 100% @ 40°C

PACKING DIMENSION

Packed by	Wooden Crate
-----------	--------------

*Specification is subject to change without notice


BELOW DECK

KA - 165 Antenna Control unit



Size	19" Rack 1U size
3 Type of Gyro input	NMEA0183, Synchro, Ste by step
Input Power	100~200V AC / 200~240V AC 50/60Hz, 8A / 4A
Output Power	TX - 48V DC, 3.2A RX - 48V DC, 4.18A
Remote Access	Tmonitor, SCS Software, Telnet Terminal
External I/O	RS232C, Mini USB, Ethernet, Console

RADOME DIMENSION

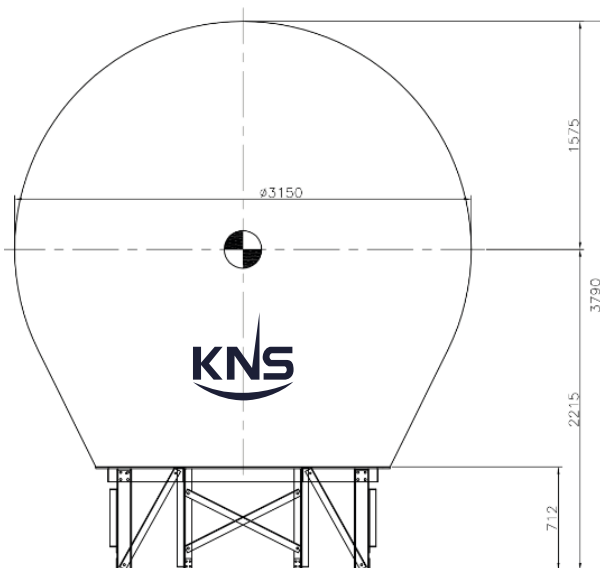

www.kns-kr.com

KNS Headquarters

1476-55, Yuseong-daero, Yuseong-gu,
Daejeon South Korea (34055)
Tel : +82 42 932 0351
Fax : +82 42 932 0353
E-mail : sales@kns-kr.com

KNS Malaysia Sales Office

20 Jalan Setia Tropika 9/15,
Taman Setia Tropika, Johor, Malaysia
Tel : +60 1673 18407
E-mail : james@kns-kr.com

KNS Europe Sales Office

Carl-Zeiss Straße 4, 71093 Weil im
Schönbuch, Germany
Tel : +49 1727 640 257
E-mail : fpollak@kns-kr.com